



MT0724 Series

MT0724 series provides a 7mm through-bore for routing of hydraulic or pneumatic lines or hydraulic or pneumatic rotating shaft installation, and a compact 24.8mm outside diameter, features long life, fiber brush contact technology for ultimate performance in many challenging applications. MT0724 series are standard, off-the-shelf products, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. It can transmit signal (2A), 5A current when 360° degree free rotating.

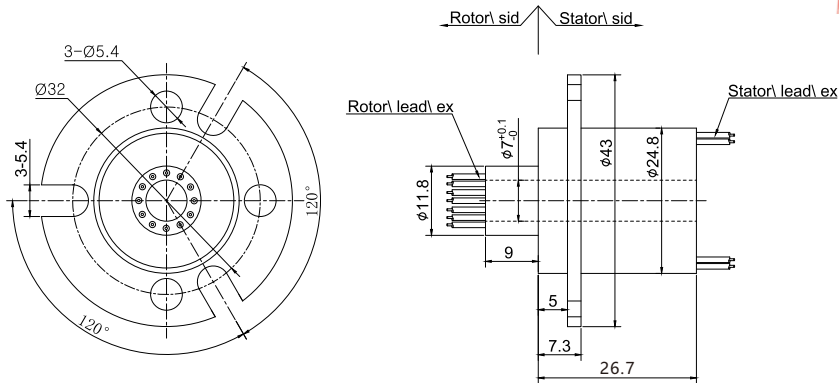

Part# Explanation

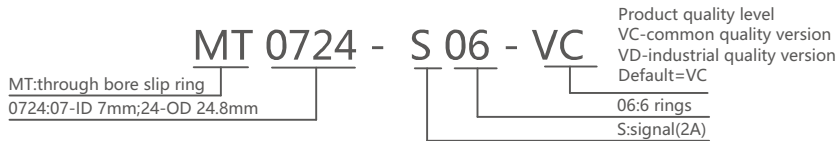

Part# List

MT0724 Series Parts# List		
Part#	Signal or 2A	Length-L (mm)
MT0724-S02	2	27
MT0724-S04	4	27
MT0724-S06	6	27
MT0724-S08	8	27
MT0724-S10	10	27
MT0724-S12	12	27

Note: N channels 2A rings parallel can be used as 1 channel N*2A current. For example: 2 rings 2A parallel could be used as 1 wires 4A

Specifications

Mechanical Data		Electrical Data		
Parameter	Value	Parameter	Value	
Working Life	10 million revs	Power	0~220VAC/VDC	
Rotating Speed	Max 250RPM	Rated Voltage	0~220VAC/VDC	Signal
Working Temperature	-30°C~80°C	Insulation Resistance	≥100MΩ/220VDC	≥100MΩ/220VDC
Operating Humidity	0~85% RH	Lead Wires	AWG28#Teflon	AWG28#Teflon
Contact Material	Gold-gold	Lead Length	Standard 300mm(adjustable)	
Housing Material	Aluminium Alloy	Insulation Strength	100VAC@50Hz,60s	
Torque	0.05N.m; +0.02N.m/6rings	Electrical Noise	<0.01Ω	
Protection Grade	IP51			

Product Quality Level Table

Products Level Code	Max Rotating Speed	Working Life	Contact Material
VC	250RPM	10 Million Revs	Precious Metal
VD	600RPM	20 Million Revs	Gold-Gold

Lead Wires Color Code

Ring Color	4 wire	1	2	3	4	8 wire	1	2	3	4	5	6	7	8
		BLK	RED	YEL	GRN		RED	GRN	YEL	PUR	GRA	BLK	BLU	DKBU