


GJ4015 (ID 15mm, 4 ports in, 4 ports out)


GJ4015 is 2 passages through bore rotary union with bore size 15mm, supporting connection size G1/8 and G3/8, It can transfer media as compressed air, vacuum, hydrogen, nitrogen, steam, cooling water, hot water, oil and so on.




Part# Explanation

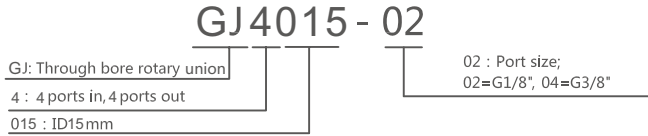

GJ4015-02 Size 4 ports in, 4 ports out, G1/8 Port

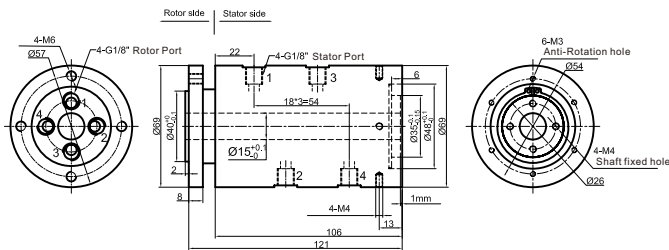

GJ4015-04 Size 4 ports in, 4 ports out, G3/8 Port

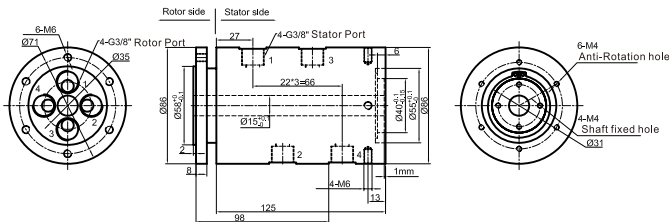

Part# List

GJ2030 Parts# List				
Part#	Passage	Torque(N.M)	Connection Size	ID
GJ4015-02	4 ports in, 4 ports out	2.3	G1/8	15mm
GJ4015-04	4 ports in, 4 ports out	2.3	G3/8	15mm

Specifications

Rotary joint specifications	
Parameter	Value
Passages	4 ports in, 4 ports out,
Max pressure	1MPa (can be customized), Vacuum -80KPa
Torque	See Part#List

Options for custom slip ring

Note: it can be customized as below requirements, lead time would increase 3~15 days, price would increase 5%~50%. Most basic parts of slip ring are standard and modularized, which saved costs and lead time.

- | | |
|---|---|
| <ul style="list-style-type: none"> 1 Port size 2 Pressure 3 Rotating speed | <ul style="list-style-type: none"> 4 Through bore size 5 Corrosive media, all stainless steel, anti-explosion, high temp etc 6 Can combine with electrical slip ring |
|---|---|
- technical support: technical@moflon.com