


MB380 Series


Industry Bus Slip Rings (high speed transmission)

MB380 series is our standard series integral and precise industry bus slip ring , with bore size 38.1mm (suitable for <=38.1mm), can support Profibus, EtherCAT, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, etc.

Note: If required through bore<38.1mm,this can be solved by adding a sleeve inside the bore.

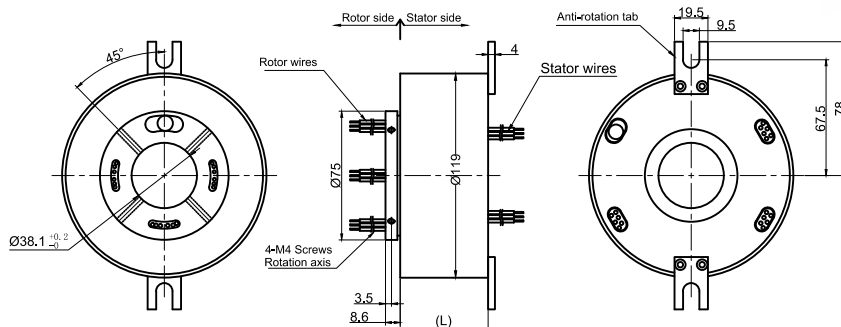

Part# Explanation

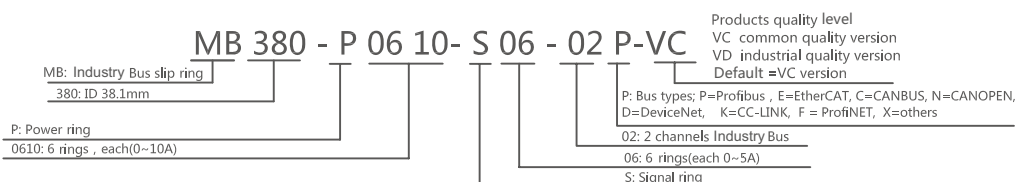

Part# List

Part#	10A	Signal or 5A	Industrial Bus	Length (mm)	Part#	10A	Signal or 5A	Industrial Bus	Length (mm)
MB120-01P	0	0	Profibus总线 x1	45.2	MB120-01E	0	0	EtherCAT总线 x1	45.2
MB120-P0610-01P	6	0	Profibus总线 x1	65.6	MB120-P0610-01E	6	0	EtherCAT总线 x1	65.6
MB120-P1210-01P	12	0	Profibus总线 x1	86	MB120-P1210-01E	12	0	EtherCAT总线 x1	86
MB120-P0610-S06-01P	6	6	Profibus总线 x1	86	MB120-P0610-S06-01E	6	6	EtherCAT总线 x1	86
MB120-S12-01P	0	12	Profibus总线 x1	86	MB120-S12-01E	0	12	EtherCAT总线 x1	86
MB120-P1810-01P	18	0	Profibus总线 x1	106.4	MB120-P1810-01E	18	0	EtherCAT总线 x1	106.4
MB120-P0610-S12-01P	6	12	Profibus总线 x1	106.4	MB120-P0610-S12-01E	6	12	EtherCAT总线 x1	106.4
MB120-P1210-S06-01P	12	6	Profibus总线 x1	106.4	MB120-P1210-S06-01E	12	6	EtherCAT总线 x1	106.4
MB120-S24-01P	0	24	Profibus总线 x1	126.8	MB120-S24-01E	0	24	EtherCAT总线 x1	126.8
MB120-P1210-S12-01P	12	12	Profibus总线 x1	126.8	MB120-P1210-S12-01E	12	12	EtherCAT总线 x1	126.8
MB120-S30-01P	0	30	Profibus总线 x1	150.2	MB120-S30-01E	0	30	EtherCAT总线 x1	150.2
MB120-S36-01P	0	36	Profibus总线 x1	170.6	MB120-S36-01E	0	36	EtherCAT总线 x1	170.6
MB120-01C	0	0	CANBUS总线 x1	45.2	MB120-01D	0	0	DeviceNET总线 x1	45.2
MB120-P0610-01C	6	0	CANBUS总线 x1	65.6	MB120-P0610-01D	6	0	DeviceNET总线 x1	65.6
MB120-P1210-01C	12	0	CANBUS总线 x1	86	MB120-P1210-01D	12	0	DeviceNET总线 x1	86
MB120-P0610-S06-01C	6	6	CANBUS总线 x1	86	MB120-P0610-S06-01D	6	6	DeviceNET总线 x1	86
MB120-S12-01C	0	12	CANBUS总线 x1	86	MB120-S12-01D	0	12	DeviceNET总线 x1	86
MB120-P1810-01C	18	0	CANBUS总线 x1	106.4	MB120-P1810-01D	18	0	DeviceNET总线 x1	106.4
MB120-P0610-S12-01C	6	12	CANBUS总线 x1	106.4	MB120-P0610-S12-01D	6	12	DeviceNET总线 x1	106.4
MB120-P1210-S06-01C	12	6	CANBUS总线 x1	106.4	MB120-P1210-S06-01D	12	6	DeviceNET总线 x1	106.4
MB120-S24-01C	0	0	CANBUS总线 x1	126.8	MB120-S24-01D	0	0	DeviceNET总线 x1	126.8
MB120-P1210-S12-01C	12	12	CANBUS总线 x1	126.8	MB120-P1210-S12-01D	12	12	DeviceNET总线 x1	126.8
MB120-S30-01C	0	30	CANBUS总线 x1	150.2	MB120-S30-01D	0	30	DeviceNET总线 x1	150.2
MB120-S36-01C	0	36	CANBUS总线 x1	170.6	MB120-S36-01D	0	36	DeviceNET总线 x1	170.6
MB120-01N	0	0	CANOPEN总线 x1	45.2	MB120-01F	0	0	ProfiNET总线 x1	45.2
MB120-P0610-01N	6	0	CANOPEN总线 x1	65.6	MB120-P0610-01F	6	0	ProfiNET总线 x1	65.6
MB120-P1210-01N	12	0	CANOPEN总线 x1	86	MB120-P1210-01F	12	0	ProfiNET总线 x1	86
MB120-P0610-S06-01N	6	6	CANOPEN总线 x1	86	MB120-P0610-S06-01F	6	6	ProfiNET总线 x1	86
MB120-S12-01N	0	12	CANOPEN总线 x1	86	MB120-S12-01F	0	12	ProfiNET总线 x1	86
MB120-P1810-01N	18	0	CANOPEN总线 x1	106.4	MB120-P1810-01F	18	0	ProfiNET总线 x1	106.4
MB120-P0610-S12-01N	6	12	CANOPEN总线 x1	106.4	MB120-P0610-S12-01F	6	12	ProfiNET总线 x1	106.4
MB120-P1210-S06-01N	12	6	CANOPEN总线 x1	106.4	MB120-P1210-S06-01F	12	6	ProfiNET总线 x1	106.4
MB120-S24-01N	0	24	CANOPEN总线 x1	126.8	MB120-S24-01F	0	24	ProfiNET总线 x1	126.8

MB380-P1210-S12-01N	12	12	CANOPEN ×1	142.4	MB380-P1210-S12-01F	12	12	ProfiNET ×1	142.4
MB380-S30-01N	0	30	CANOPEN ×1	169.2	MB380-S30-01F	0	30	ProfiNET ×1	169.2
MB380-S36-01N	0	36	CANOPEN ×1	192	MB380-S36-01F	0	36	ProfiNET ×1	192
MB380-01K	0	0	CC-LINK ×1	51.2	MB380-P0610-S12-01K	6	12	CC-LINK ×1	119.6
MB380-P0610-01K	6	0	CC-LINK ×1	74	MB380-P1210-S06-01K	12	6	CC-LINK ×1	119.6
MB380-P1210-01K	12	0	CC-LINK ×1	96.8	MB380-S24-01K	0	24	CC-LINK ×1	142.4
MB380-P0610-S06-01K	6	6	CC-LINK ×1	96.8	MB380-P1210-S12-01K	12	12	CC-LINK ×1	142.4
MB380-S12-01K	0	12	CC-LINK ×1	96.8	MB380-S30-01K	0	30	CC-LINK ×1	169.2
MB380-P1810-01K	18	0	CC-LINK ×1	119.6	MB380-S36-01K	0	36	CC-LINK ×1	192

Note: 1) N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A
 2) Power 10A and signal rings number can be with flexible module configuration on customer's request. Please contact customer service for more various industrial bus configuration.

Specifications

Mechanical Data		Electrical Data		
Parameter	Value	Parameter	Value	
Working Life	See product quality level table		Power	Signal
Rotating Speed	See product quality level table	Rated Voltage	0~440VAC/VDC	0~440VAC/VDC
Working Temperature	-30°C~80°C	Insulation Resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
Operating Humidity	0~85% RH	Lead Wire	AWG16#Teflon	AWG22#Teflon or bus cable
Contact Material	See product quality level table	Lead Length	standard length 300mm (adjustable)	
Housing Material	aluminum alloy	Insulating Strength	500VAC@50Hz, 60s	
Torque	0.1N.m; +0.03N.m/6 rings	Electrical Noise	<0.01Ω	
Protection Grade	IP51			

Product Quality Level Table

Quality Level Code	Max Rotating Speed	Working Life	Contact Material
VC (Common Version)	200RPM	15 Million Revs	Precious Metal
VD (Industrial Version)	600RPM	80 Million Revs	Gold-Gold
VH (high-end version)	1000RPM	150 Million Revs	Aluminum Alloy

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YEL	GRN	BLU	WHT	BLK	RED	YEL	GRN	BLU	WHT

(6 wires for 1 group colors, from 7-12, repeat the same color as 1...6, indicated with number code pipe.)

Options For Custom Slip Ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Bore diameter can be customized; cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com