



GT3899F Series

GT3899F series provides a 38.1mm through-bore for routing of hydraulic or pneumatic lines or hydraulic or pneumatic rotating shaft installation, and a compact 99mm outside diameter; features long life, fiber brush contact technology for ultimate performance in many challenging applications. GT3899F series are standard, off-the-shelf products, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. It can transmit signal (2A), 10A, multiple 10A current when 360° degree free rotating.

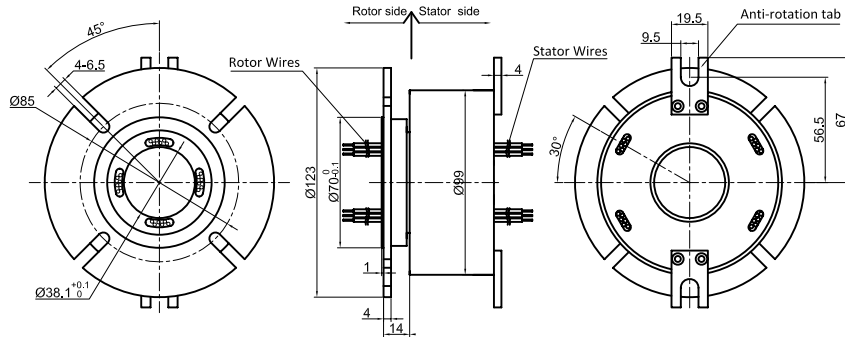

Part# Explanation

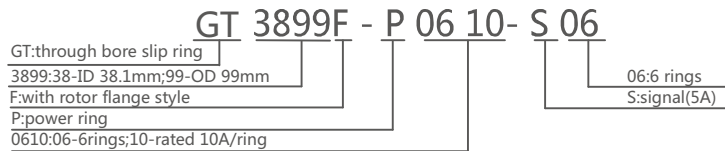

Part# List

GT3899F Series Parts# List							
Part#	10A	Signal or 5A	Length-L (mm)	Part#	10A	Signal or 5A	Length-L (mm)
GT3899F-S02	0	2	39.2	GT3899F-P1210-S12	12	12	114
GT3899F-P0210	2	0	39.2	GT3899F-P1810-S06	18	6	114
GT3899F-S03	0	3	42.6	GT3899F-P2410	24	0	114
GT3899F-P0310	3	0	42.6	GT3899F-S30	0	30	134.4
GT3899F-S06	0	6	52.8	GT3899F-P0610-S24	6	24	134.4
GT3899F-P0210-S04	2	4	52.8	GT3899F-P1210-S18	12	18	134.4
GT3899F-P0410-S02	4	2	52.8	GT3899F-P1810-S12	18	12	134.4
GT3899F-P0610	6	0	52.8	GT3899F-P2410-S06	24	6	134.4
GT3899F-S12	0	12	73.2	GT3899F-P3010	30	0	134.4
GT3899F-P0210-S10	2	10	73.2	GT3899F-S36	0	36	157.8
GT3899F-P0310-S09	3	9	73.2	GT3899F-P0610-S30	6	30	157.8
GT3899F-P0610-S06	6	6	73.2	GT3899F-P1210-S24	12	24	157.8
GT3899F-P0810-S04	8	4	73.2	GT3899F-P3610	36	0	157.8
GT3899F-P1010-S02	10	2	73.2	GT3899F-S42	0	42	178.2
GT3899F-P1210	12	0	73.2	GT3899F-P0610-S36	6	36	178.2
GT3899F-S18	0	18	93.6	GT3899F-P1210-S30	12	30	178.2
GT3899F-P0210-S16	2	16	93.6	GT3899F-S48	0	48	198.6
GT3899F-P0410-S14	4	14	93.6	GT3899F-P0610-S42	6	42	198.6
GT3899F-P0610-S12	6	12	93.6	GT3899F-P0910-S39	9	39	198.6
GT3899F-P0810-S10	8	10	93.6	GT3899F-P1210-S36	12	36	198.6
GT3899F-P1010-S08	10	8	93.6	GT3899F-P1810-S30	18	30	198.6
GT3899F-P1210-S06	12	6	93.6	GT3899F-P2410-S24	24	24	198.6
GT3899F-P1410-S04	14	4	93.6	GT3899F-S60	0	60	242.4
GT3899F-P1610-S02	16	2	93.6	GT3899F-P0610-S54	6	54	242.4
GT3899F-P1810	18	0	93.6	GT3899F-P0810-S52	8	52	242.4
GT3899F-S24	0	24	114	GT3899F-P1010-S0	10	50	242.4

GT3899F-P0410-S20	4	20	114	GT3899F-P1210-S48	12	48	242.4
GT3899F-P0610-S18	6	18	114	GT3899F-S72	0	72	283.2

Note: N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A. 10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for more detmails.

Specifications

Electrical Data		
Parameter	Value	
	Power	Signal
Rated Voltage	0~690VAC/VDC	0~440VAC/VDC
Insulation Resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
Lead Wires	AWG16#Teflon	AWG22#Teflon
Lead Length	Standard 300mm(adjustable)	
Insulation Strength	1000VAC@50Hz , 60s	
Electrical Noise	<0.01Ω	
Mechanical Data		
Parameter	Value	
Working Life	100 Million Revs	
Rotating Speed	1~1800RPM	
Working Temperature	-30℃~80℃	
Operating Humidity	0~85% RH	
Contact Material	Precious Metal	
Housing Material	Aluminium Alloy	
Torque	0.1N.m ; +0.03N.m/6rings	
Protection Grade	IP51	

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YEL	GRN	BLU	WHT	BLK	RED	YEL	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options For Custom Slip Ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com