



# GT60130Series

Standard series of integral precision conductive slip rings with outer diameter of 130mm and through hole diameter of 60mm (applicable to  $\leq 60\text{mm}$ ).

\*Note: if the inner hole of  $< 60\text{mm}$  is needed, it can be solved by adding inner sleeve.

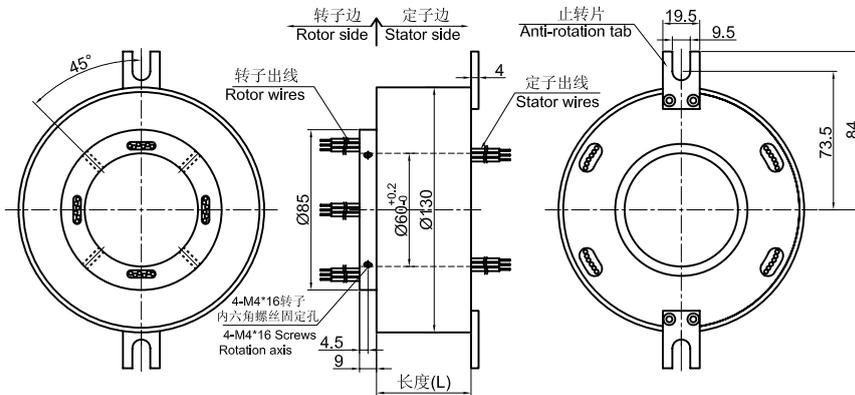

## Part# Explanation

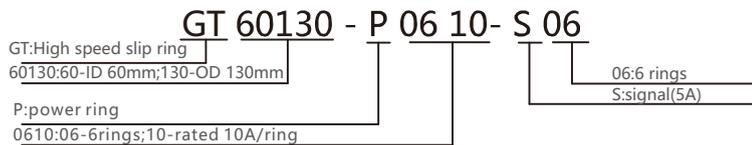

## Part# List

Gt60130Series Parts# List							
Part#	10A	Signal/5A	Length-L (mm)	Part#	10A	Signal/5A	Length-L (mm)
GT60130-S06	0	06	59.6	GT60130-P1810-S12	18	12	155.8
GT60130-P0210-S04	02	04	59.6	GT60130-P2410-S06	24	06	155.8
GT60130-P0410-S02	04	02	59.6	GT60130-P3010	30	0	155.8
GT60130-P0610	06	0	59.6	GT60130-S36	0	36	178.6
GT60130-S12	0	12	82.4	GT60130-P0610-S30	06	30	178.6
GT60130-P0210-S10	02	10	82.4	GT60130-P1210-S24	12	24	178.6
GT60130-P0410-S08	04	08	82.4	GT60130-P1810-S18	18	18	178.6
GT60130-P0610-S06	06	06	82.4	GT60130-P2410-S12	24	12	178.6
GT60130-P0810-S04	08	04	82.4	GT60130-P3610	36	0	178.6
GT60130-P1010-S02	10	02	82.4	GT60130-S48	0	48	224.2
GT60130-P1210	12	0	82.4	GT60130-P0610-S42	06	42	224.2
GT60130-S18	0	18	105.2	GT60130-P1210-S36	12	36	224.2
GT60130-P0210-S16	02	16	105.2	GT60130-P1810-S30	18	30	224.2
GT60130-P0410-S14	04	14	105.2	GT60130-P2410-S24	24	24	224.2
GT60130-P0610-S12	06	12	105.2	GT60130-S60	0	60	274.8
GT60130-P0810-S10	08	10	105.2	GT60130-P0610-S54	06	54	274.8
GT60130-P1010-S08	10	08	105.2	GT60130-P1210-S48	12	48	274.8
GT60130-P1210-S06	12	06	105.2	GT60130-P1810-S42	18	42	274.8
GT60130-P1410-S04	14	04	105.2	GT60130-P2410-S36	24	36	274.8
GT60130-P1610-S02	16	02	105.2	GT60130-S72	0	72	320.4
GT60130--S24	0	24	128	GT60130-P0610-S66	06	66	320.4
GT60130-P1610-S18	06	18	128	GT60130-P1210-S60	12	60	320.4
GT60130-P1210-S12	12	12	128	GT60130-P2410-S48	24	48	320.4
GT60130-P0810-S06	18	06	128	GT60130-P3610-S36	36	36	320.4
GT60130-P2410	24	0	128	GT60130-S84	0	84	369
GT60130-S30	0	30	155.8	GT60130-P1210-S72	12	72	369

GT60130-P0610-S24	06	24	155.8	GT60130F-P2410-S60	24	60	369
GT60130-P1210-S18	12	18	155.8	GT60130F-S96	0	96	414.6

Note: N channels 10A rings parallel can be used as 1 channel N\*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A.  
10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for more detmails.

## Specifications

Electrical Data		
Parameter	Value	
	Power	Signal
Rated Voltage	0~690VAC/VDC	0~440VAC/VDC
Insulation Resistance	≥1000MΩ/1000VDC	≥1000MΩ/500VDC
Lead Wires	AWG16#Teflon	AWG22#Teflon
Lead Length	standard 300mm(adjustable)	
Insulation Strength	1000VAC@50Hz, 60s	
Electrical Noise	<0.03Ω	
Mechanical Data		
Parameter	Value	
Working Life	See Product Quality Level Table	
Rotating Speed	See Product Quality Level Table	
Working Temperature	-30°C~80°C	
Operating Humidity	0~85% RH	
Contact Material	Precious Metal	
Housing Material	Aluminium Alloy	
Protection Grade	IP51	

## Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YLW	GRN	BLU	WHT	BLK	RED	YLW	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

## Options for custom slip ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: [technical@moflon.com](mailto:technical@moflon.com)