


KRHG Series Rotary Joints


Applicable medium	Temperature	Max pressure	Max Rotary Speed
Heat Transfer oil	220°C	1.0Mpa	200RPM

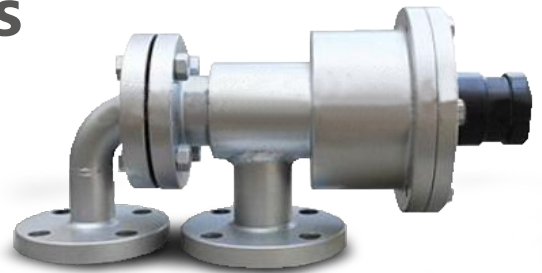

Product Features

- ▲ Balanced sealing design;
- ▲ High precision metal bearings self support;
- ▲ Various sealing combinations are suitable for different working conditions.

Dimension

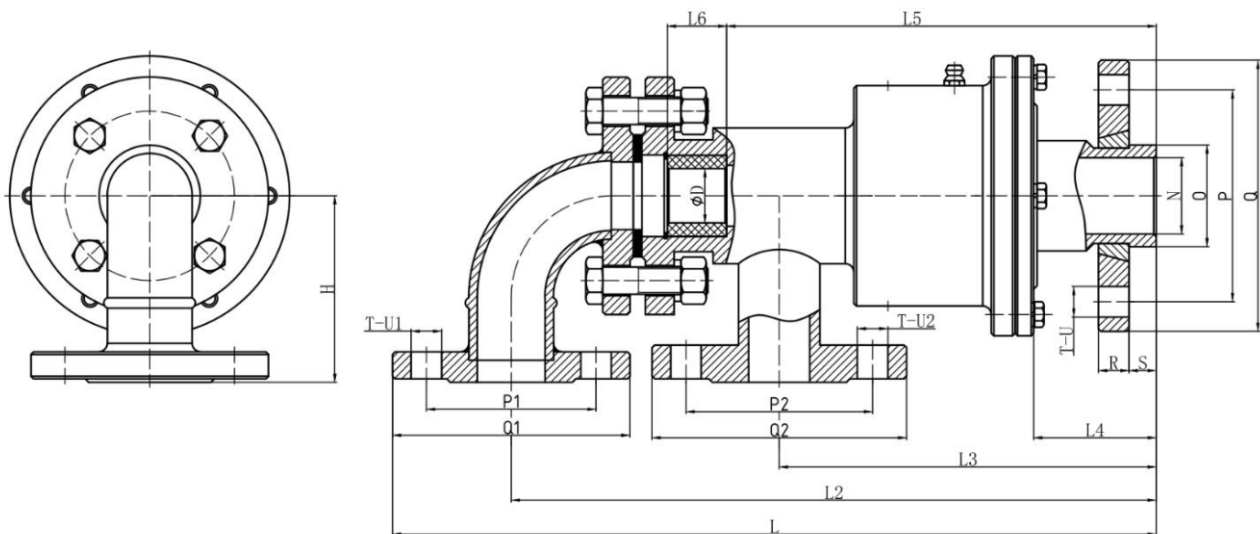

Model selection table

Size	D	L	L2	L3	L4	L5	L6	H	N	O	P	Q	R	S	T-U	P1	Q1	T-U1	P2	Q2	T-U2	
050	2"	32	420	357	217	75	253	35	120	45	60	125	160	18	16	4-Φ18	100	130	4-Φ18	110	145	4-Φ18
065	2-1/2"	40	/	/	/	/	/	/	60	75	145	180	18	16	4-Φ18	110	140	4-Φ18	125	160	4-Φ18	
080	3"	50	554	471	257	80	306	40	130	70	90	160	195	20	18	8-Φ18	125	160	4-Φ18	145	180	4-Φ18
100	4"	60	632	542	322	80	375	30	160	98	114	180	215	22	18	8-Φ22	145	180	4-Φ18	160	195	4-Φ18
125	5"	80	650	535	315	85	/	/	180	120	144	210	245	24	20	8-Φ22	160	195	4-Φ18	160	195	4-Φ18
150	6"	90	795	615	355	100	/	/	120	150	175	240	280	28	22	8-Φ22	190	230	8-Φ18	190	230	8-Φ18