
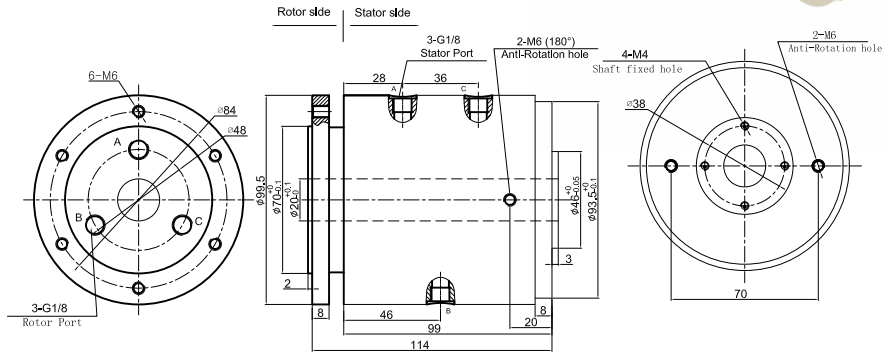


# MJ3020 (ID 20mm, 3 ports in, 3 ports out)

MJ3020 is 3 passages through bore rotary union with bore size 20mm, supporting connection size G1/8 and G1/4. It can transfer media as compressed air, vacuum, hydrogen, nitrogen, steam, cooling water, hot water, oil and so on.



## Part# Explanation

MJ 3020 - 02 - VC

Products quality level  
 VC common quality version  
 VD industrial quality version  
 Default =VC version

MJ: Through bore rotary union  
 3 : 3 ports in, 3 ports out  
 020 : ID20mm  
 02 : Port size;  
 01=M5 , 02=G1/8" , 03=G1/4 " , 04=G3/8" , 05=G1/2"

## Part# List

MJ3020 Parts# List				
Part#	Passage	Torque(N.M)	Connection Size	ID
MJ3020-02	3 ports in, 3 ports out	5	G1/8	20mm
MJ3020-03	3 ports in, 3 ports out	6	G1/4	20mm

## Specifications

Rotary joint specifications	
Parameter	Value
Passages	3 ports in, 3 ports out,
Max pressure	10MPa (can be customized) , Vacuum 0.01torr
Torque	See Part#List

## Product Quality Level Table

Quality Level Table			
Products Level Code	Max Rotating Speed	Working Life	Sealing Element
VC	100RPM	10 million	Common Seals
VD	300RPM	30 million	High-Quality Seals

## Options for custom slip ring

Note: it can be customized as below requirements, lead time would increase 3~15 days, price would increase 5%~50%. Most basic parts of slip ring are standard and modularized, which saved costs and lead time.

- 1 Port size
- 2 Pressure
- 3 Rotating speed
- 4 Through bore size
- 5 Corrosive media, all stainless steel, anti-explosion, high temp etc
- 6 Can combine with electrical slip ring

technical support: [technical@moflon.com](mailto:technical@moflon.com)