
MJ3030(ID 30mm, 3 ports in,3 ports out)

MJ3030 is 3 passages through bore rotary union with bore size 30mm, supporting connection size G1/8 and G1/4, It can transfer media as compressed air,vacuum,hydrogen,nitrogen,steam,cooling water,hot water,oil and so on.



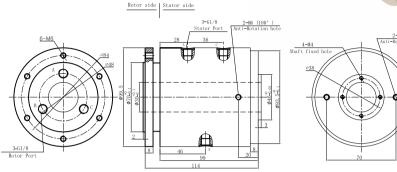

Part# Explanation

MJ 3030 - 02

- VC

Products quality level VC common quality version VD industrial quality version Default =VC version

MJ: Through bore rotary union 3:3 ports in,3 ports out

030 : ID30mm

02 : Port size;

01=M5 , 02=G1/8" , 03=G1/4 ", 04=G3/8", 05=G1/2"

Part# List

MJ3030 Parts# List					
Part#	Passage	Torque(N.M)	Connection Size	ID	
MJ3030-02	3 ports in,3 ports out	5	G1/8	30mm	
MJ3030-03	3 ports in,3 ports out	6	G1/4	30mm	

Specifications

Rotary joint specifications				
Parameter Value				
Passages	3 ports in,3 ports out,			
Max pressure	10MPa (can be customized) , Vacuum 0.01torr			
Torque	See Part#List			

Product Quality Level Table

Quality Level Table					
Products Level Code	Max Rotating Speed	Working Life	Sealing Element		
VC	100RPM	10 million	Common Seals		
VD	300RPM	30 million	High-Quality Seals		

Options for custom slip ring

Note: it can be customed as below requirements, lead time would increase 3~15 days, price would increase 5%~50%. Most basic parts of slip ring are standard and modularized, which saved costs and lead time.

- 1 Port size
- 2 Pressure
- 3 Rotating speed

technical support: technical@moflon.com

- 4 Through bore size
- 5 Corrosive media, all stainless steel, anti-explosion, high temp etc
- 6 Can combine with electrical slip ring