
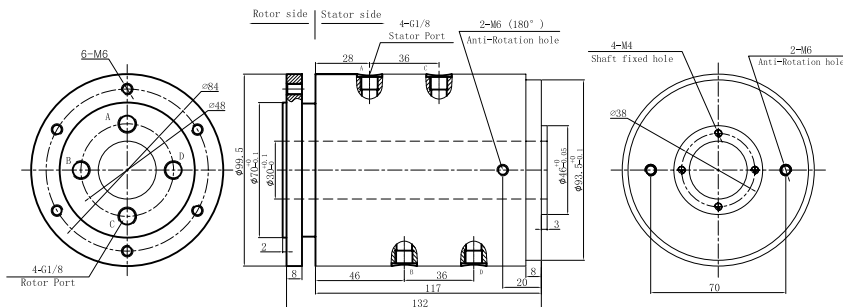


MJ4030 (ID 30mm, 4 ports in, 4 ports out)

MJ3030 is 4 passages through bore rotary union with bore size 30mm, supporting connection size G1/8 and G1/4. It can transfer media as compressed air, vacuum, hydrogen, nitrogen, steam, cooling water, hot water, oil and so on.



Part# Explanation

MJ 4030 - 02 - VC

Products quality level
 VC common quality version
 VD industrial quality version
 Default = VC version

MJ: Through bore rotary union

4 : 4 ports in, 4 ports out

030 : ID 30mm

02 : Port size;

01=M5 , 02=G1/8" , 03=G1/4 " , 04=G3/8" , 05=G1/2"

Part# List

MJ4030 Parts# List				
Part#	Passage	Torque(N.M)	Connection Size	ID
MJ4030-02	4 ports in, 4 ports out	6	G1/8	30mm
MJ4030-03	4 ports in, 4 ports out	7	G1/4	30mm

Specifications

Rotary joint specifications	
Parameter	Value
Passages	4 ports in, 4 ports out,
Max pressure	10MPa (can be customized) , Vacuum 0.01torr
Torque	See Part#List

Product Quality Level Table

Quality Level Table			
Products Level Code	Max Rotating Speed	Working Life	Sealing Element
VC	100RPM	10 million	Common Seals
VD	300RPM	30 million	High-Quality Seals

Options for custom slip ring

Note: it can be customized as below requirements, lead time would increase 3~15 days, price would increase 5%~50%. Most basic parts of slip ring are standard and modularized, which saved costs and lead time.

1 Port size

2 Pressure

3 Rotating speed

technical support: technical@moflon.com

4 Through bore size

5 Corrosive media, all stainless steel, anti-explosion, high temp etc

6 Can combine with electrical slip ring