

# MK Series Pneumatic Rotary Union


Applicable medium	Temperature	pressure	Max Rotary Speed
compressed air	-30°C ~ +80°C	10bar (Customizable high voltage)	500RPM
vacuum		vacuum 0.01torr	



## Product Features

- ▲ Simultaneously transmitting gas, power signal, and other media while rotating 360 degrees;
- ▲ Supports 1/2/3/4/5/6/8/10/12/16/24 gas channels;
- ▲ Standard interfaces include G1/8", G3/8", etc., which can be customized according to customer requirements;
- ▲ Can transmit compressed air, vacuum, hydraulic oil, water, hot water, coolant, steam and other media, and can customize special requirements such as high-speed and high-pressure according to requirements.

## MK208 (pure pneumatic rotary joint) 2 in and 2 out Dimension

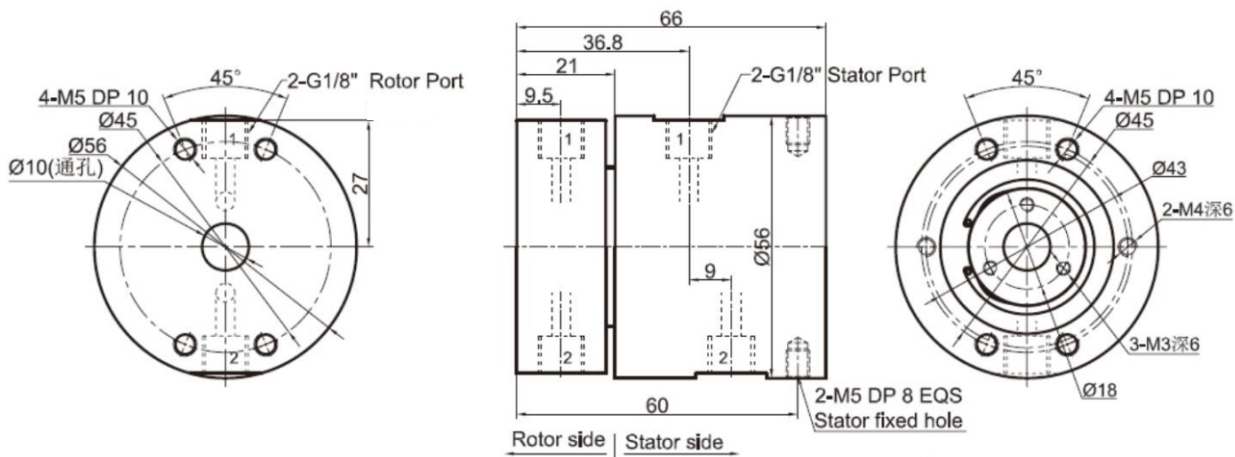

Model	Number of gas channels	interface size	Adaptable trachea
MK208	2	G1/8"	6-8mm
MK210	2	G3/8"	10-12mm
MK408	4	G1/8"	6-8mm
MK410	4	G3/8"	10-12mm
MK808	8	G1/8"	6-8mm
MK810	8	G3/8"	10-12mm
MK1208	12	G1/8"	6-8mm
MK1210	12	G3/8"	10-12mm
MK2408	24	G1/8"	6-8mm
MK2410	24	G3/8"	10-12mm

Note: If you need the corresponding model drawings, please contact sales personnel.