



MT50119F Series

MT50119F series provides a 50mm through-bore for routing of hydraulic or pneumatic lines or hydraulic or pneumatic rotating shaft installation, and a compact 119mm outside diameter, features long life, fiber brush contact technology for ultimate performance in many challenging applications. MT50119F series are standard, off-the-shelf products, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. It can transmit signal(2A), 10A, multiple 10A current when 360° degree free rotating.

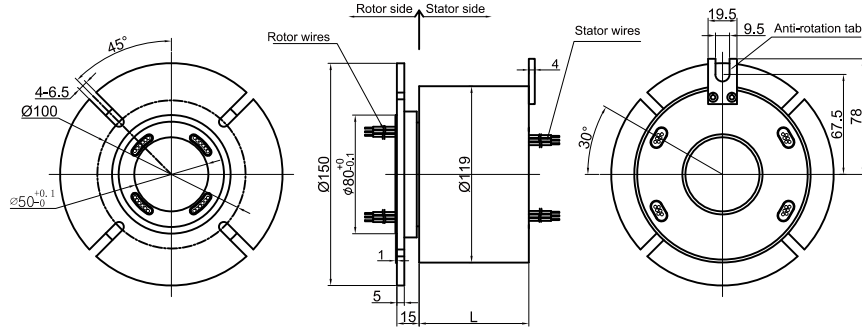

Part# Explanation

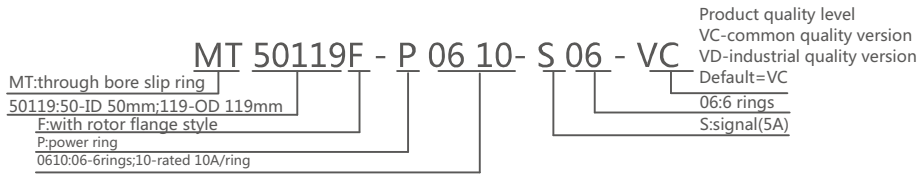

Part# List

MT50119F Series Parts# List							
Part#	10A	Signal or 5A	Length-L (mm)	Part#	10A	Signal or 5A	Length-L (mm)
MT50119F-S02	0	2	36	MT50119F-S36	0	36	165.2
MT50119F-P0210	2	0	36	MT50119F-P0610-S30	6	30	165.2
MT50119F-S03	0	3	39.8	MT50119F-P1210-S24	12	24	165.2
MT50119F-P0310	3	0	39.8	MT50119F-P3610	36	0	165.2
MT50119F-S06	0	6	51.2	MT50119F-S42	0	42	192
MT50119F-P0210-S04	2	4	51.2	MT50119F-P0610-S36	6	36	192
MT50119F-P0410-S02	4	2	51.2	MT50119F-P1210-S30	12	30	192
MT50119F-P0610	6	0	51.2	MT50119F-S48	0	48	214.8
MT50119F-S12	0	12	74	MT50119F-P0610-S42	6	42	214.8
MT50119F-P0210-S10	2	10	74	MT50119F-P0910-S39	9	39	214.8
MT50119F-P0310-S09	3	9	74	MT50119F-P1210-S36	12	36	214.8
MT50119F-P0610-S06	6	6	74	MT50119F-P1810-S30	18	30	214.8
MT50119F-P0810-S04	8	4	74	MT50119F-P2410-S24	24	24	214.8
MT50119F-P1010-S02	10	2	74	MT50119F-S60	0	60	260.4
MT50119F-P1210	12	0	74	MT50119F-P0610-S54	6	54	260.4
MT50119F-S18	0	18	96.8	MT50119F-P0910-S51	9	51	260.4
MT50119F-P0210-S16	2	16	96.8	MT50119F-P1210-S48	12	48	260.4
MT50119F-P0410-S14	4	14	96.8	MT50119F-S72	0	72	310
MT50119F-P0610-S12	6	12	96.8	MT50119F-P0610-S66	6	66	310
MT50119F-P0810-S10	8	10	96.8	MT50119F-P1210-S60	12	60	310
MT50119F-P1010-S08	10	8	96.8	MT50119F-P2410-S48	24	48	310
MT50119F-P1210-S06	12	6	96.8	MT50119F-P3610-S36	36	36	310
MT50119F-P1410-S04	14	4	96.8	MT50119F-S84	0	84	355.6
MT50119F-P1610-S02	16	2	96.8	MT50119F-P1210-S72	12	72	355.6
MT50119F-S24	0	24	119.6	MT50119F-P2410-S60	24	60	355.6
MT50119F-P0410-S20	4	20	119.6	MT50119F-P3610-S48	36	48	355.6
MT50119F-P0610-S18	6	18	119.6	MT50119F-S96	0	96	401.2
MT50119F-P1210-S12	12	12	119.6	MT50119F-P1210-S84	12	84	401.2
MT50119F-P1810-S06	18	6	119.6	MT50119F-P2410-S72	24	72	401.2
MT50119F-P2410	24	0	119.6	MT50119F-P3610-S60	36	60	401.2
MT50119F-S30	0	30	142.4	MT50119F-P4210-S54	42	54	401.2
MT50119F-P0610-S24	6	24	142.4	MT50119F-S108	0	108	450.8
MT50119F-P1210-S18	12	18	142.4	MT50119F-P1210-S96	12	96	450.8
MT50119F-P1810-S12	18	12	142.4	MT50119F-P2410-S84	24	84	450.8
MT50119F-P2410-S06	24	6	142.4	MT50119F-P3610-S72	36	72	450.8
MT50119F-P3010	30	0	142.4	MT50119F-P4810-S60	48	60	450.8

Note: N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A. 10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for more details.

Specifications

Electrical Data			
Parameter	Value		
	Power		Signal
Rated Voltage	0~690VAC/VDC		0~440VAC/VDC
Insulation Resistance	≥1000MΩ/500VDC		≥1000MΩ/500VDC
Lead Wires	AWG16#Teflon		AWG22#Teflon
Lead Length	Standard 300mm(adjustable)		
Insulation Strength	1000VAC@50Hz , 60s		
Electrical Noise	<0.01Ω		
Mechanical Data			
Parameter	Value		
Working Life	See Product Quality Level Table		
Rotating Speed	See Product Quality Level Table		
Working Temperature	-30°C~80°C		
Operating Humidity	0~85% RH		
Contact Material	See Product Quality Level Table		
Housing Material	Aluminium Alloy		
Torque	0.1N.m ; +0.03N.m/6rings		
Protection Grade	IP51		

Product Quality Level Table

Products Level Code	Max Rotating Speed	Working Life	Contact Material
VC	250RPM	20 Million Revs	Precious Metal
VD	600RPM	80 Million Revs	Gold-plated
VH	1000RPM	150 Million Revs	Gold-Gold

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YEL	GRN	BLU	WHT	BLK	RED	YEL	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options For Custom Slip Ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com