
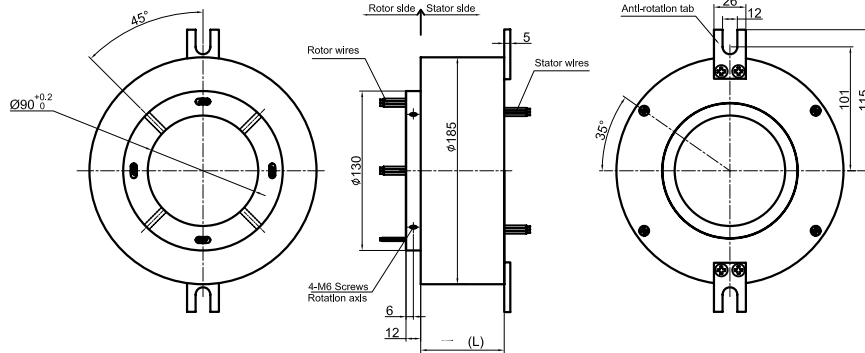


MT90185 Series

MT90185 series provides a 90mm through-bore for routing of hydraulic or pneumatic lines or hydraulic or pneumatic rotating shaft installation, and a compact 185mm outside diameter, features long life, fiber brush contact technology for ultimate performance in many challenging applications. MT90185 series are standard, off-the-shelf products, Color-coded lead wires are used on both the stator and rotor for simplified electrical connections. It can transmit signal(2A), 10A, multiple 10A current when 360° degree free rotating.



Part# Explanation

MT 90185 - P 06 10- S 06 - VC

MT:through bore slip ring
 90185:90-ID 90mm;185-OD 185mm
 P:power ring
 0610:06-6rings;10-rated 10A/ring
 Product quality level
 VC-common quality version
 VD-industrial quality version
 Default=VC
 06:6 rings
 S:signal(5A)

Part# List

MT90185 Series Parts# List							
Part#	10A	Signal or 5A	Length-L (mm)	Part#	10A	Signal or 5A	Length-L (mm)
MT90185-S02	0	2	50	MT90185-S36	0	36	191
MT90185-P0210	2	0	50	MT90185-P0610-S30	6	30	191
MT90185-S03	0	3	54	MT90185-P1210-S24	12	24	191
MT90185-P0310	3	0	54	MT90185-P3610	36	0	191
MT90185-S06	0	6	66	MT90185-S42	0	42	215
MT90185-P0210-S04	2	4	66	MT90185-P0610-S36	6	36	215
MT90185-P0410-S02	4	2	66	MT90185-P1210-S30	12	30	215
MT90185-P0610	6	0	66	MT90185-S48	0	48	239
MT90185-S12	0	12	90	MT90185-P0610-S42	6	42	239
MT90185-P0210-S10	2	10	90	MT90185-P0910-S39	9	39	239
MT90185-P0310-S09	3	9	90	MT90185-P1210-S36	12	36	239
MT90185-P0610-S06	6	6	90	MT90185-P1810-S30	18	30	239
MT90185-P0810-S04	8	4	90	MT90185-P2410-S24	24	24	239
MT90185-P1010-S02	10	2	90	MT90185-S60	0	60	287
MT90185-P1210	12	0	90	MT90185-P0610-S54	6	54	287
MT90185-S18	0	18	114	MT90185-P0910-S51	9	51	287
MT90185-P0210-S16	2	16	114	MT90185-P1210-S48	12	48	287
MT90185-P0410-S14	4	14	114	MT90185-S72	0	72	340
MT90185-P0610-S12	6	12	114	MT90185-P0610-S66	6	66	340
MT90185-P0810-S10	8	10	114	MT90185-P1210-S60	12	60	340
MT90185-P1010-S08	10	8	114	MT90185-P2410-S48	24	48	340
MT90185-P1210-S06	12	6	114	MT90185-P3610-S36	36	36	340
MT90185-P1410-S04	14	4	114	MT90185-S84	0	84	388
MT90185-P1610-S02	16	2	114	MT90185-P1210-S72	12	72	388
MT90185-S24	0	24	138	MT90185-P2410-S60	24	60	388
MT90185-P0410-S20	4	20	138	MT90185-P3610-S48	36	48	388
MT90185-P0610-S18	6	18	138	MT90185-S96	0	96	436
MT90185-P1210-S12	12	12	138	MT90185-P1210-S84	12	84	436
MT90185-P1810-S06	18	6	138	MT90185-P2410-S72	24	72	436
MT90185-P2410	24	0	138	MT90185-P3610-S60	36	60	436
MT90185-S30	0	30	162	MT90185-P4210-S54	42	54	436
MT90185-P0610-S24	6	24	162	MT90185-S108	0	108	489
MT90185-P1210-S18	12	18	162	MT90185-P1210-S96	12	96	489
MT90185-P1810-S12	18	12	162	MT90185-P2410-S84	24	84	489
MT90185-P2410-S06	24	6	162	MT90185-P3610-S72	36	72	489
MT90185-P3010	30	0	162	MT90185-P4810-S60	48	60	489

Note: N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A. 10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for more detmails.

Specifications

Electrical Data		
Parameter	Value	
	Power	Signal
Rated Voltage	0~690VAC/VDC	0~440VAC/VDC
Insulation Resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
Lead Wires	AWG16#Teflon	AWG22#Teflon
Lead Length	Standard 300mm(adjustable)	
Insulation Strength	1000VAC@50Hz , 60s	
Electrical Noise	<0.01Ω	
Mechanical Data		
Parameter	Value	
Working Life	See Product Quality Level Table	
Rotating Speed	See Product Quality Level Table	
Working Temperature	-30°C~80°C	
Operating Humidity	0~85% RH	
Contact Material	See Product Quality Level Table	
Housing Material	Aluminium Alloy	
Torque	0.1N.m ; +0.03N.m/6rings	
Protection Grade	IP51	

Product Quality Level Table

Products Level Code	Max Rotating Speed	Working Life	Contact Material
VC	150RPM	10 Million Revs	Precious Metal
VD	400RPM	30 Million Revs	Gold-plated
VH	800RPM	80 Million Revs	Gold-Gold

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YEL	GRN	BLU	WHT	BLK	RED	YEL	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options For Custom Slip Ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com