


# MW2050 Series Slip Rings

MW2050 series is large current slip ring with bore diameter 50mm. The through bore slip ring can be used for shaft installation or through gas-liquid catheter. This series slip ring can be with rated current 20A/30A/50A to over 100A.

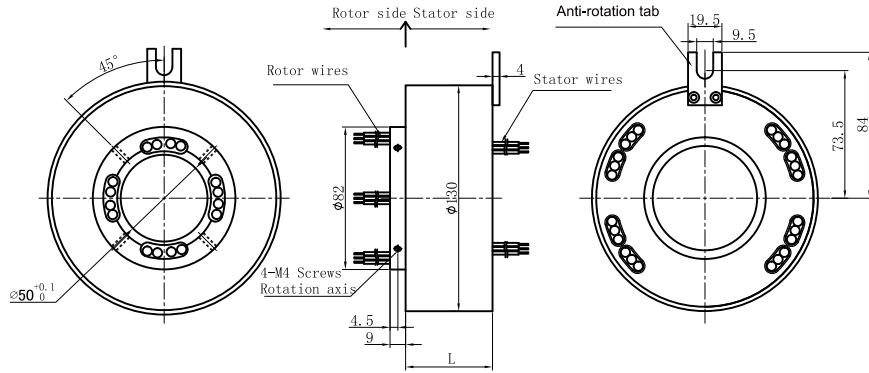

## Part# Explanation

### MW 2050 - P02100-S06 - VC

MW:large current series slip ring  
 2 : through bore with cable exit  
 050 : bore size 50mm  
 P02100 : P-power ring, 02-2 rings ( wire),  
 100-rated current 100A  
 S06 : S-signal ring ( or 5A) 06-6 rings ( wire)

Product quality level  
 VC-common quality version  
 VD-industrial quality version  
 Default=VC

## Part# List

Mw2050 Series slip ring part# list																
Part#	60A	100A	150A	200A	300A	500A	length ( mm )	part#	60A	100A	150A	200A	300A	500A	Signal ring (Thermocouple)	Length ( mm )
MW2050-P0160	1	0	0	0	0	0	39.2	MW2050-P0160-S06	1	0	0	0	0	0	6	60.8
MW2050-P01100	0	1	0	0	0	0	50	MW2050-P01100-S06	0	1	0	0	0	0	6	71.6
MW2050-P01150	0	0	1	0	0	0	65	MW2050-P01150-S06	0	0	1	0	0	0	6	95
MW2050-P01200	0	0	0	1	0	0	65	MW2050-P01200-S06	0	0	0	1	0	0	6	95
MW2050-P01300	0	0	0	0	1	0	95	MW2050-P01300-S06	0	0	0	0	1	0	6	125
MW2050-P01500	0	0	0	0	0	1	125	MW2050-P01500-S06	0	0	0	0	0	1	6	155
MW2050-P0260	2	0	0	0	0	0	50	MW2050-P0260-S06	2	0	0	0	0	0	6	71.6
MW2050-P02100	0	2	0	0	0	0	71.6	MW2050-P02100-S06	0	2	0	0	0	0	6	93.2
MW2050-P02150	0	0	2	0	0	0	95	MW2050-P02150-S06	0	0	2	0	0	0	6	125
MW2050-P02200	0	0	0	2	0	0	95	MW2050-P02200S-06	0	0	0	2	0	0	6	125
MW2050-P02300	0	0	0	0	2	0	155	MW2050-P02300-S06	0	0	0	0	2	0	6	185
MW2050-P02500	0	0	0	0	0	2	215	MW2050-P02500-S06	0	0	0	0	0	2	6	245
MW2050-P0360	3	0	0	0	0	0	60.8	MW2050-P0360-S06	3	0	0	0	0	0	6	82.4
MW2050-P03100	0	3	0	0	0	0	93.2	MW2050-P03100-S06	0	3	0	0	0	0	6	114.8
MW2050-P03150	0	0	3	0	0	0	125	MW2050-P03150-S06	0	0	3	0	0	0	6	155
MW2050-P03200	0	0	0	3	0	0	125	MW2050-P03200-S06	0	0	0	3	0	0	6	155
MW2050-P03300	0	0	0	0	3	0	215	MW2050-P03300-S06	0	0	0	0	3	0	6	245
MW2050-P03500	0	0	0	0	0	3	215	MW2050-P03500-S06	0	0	0	0	0	3	6	245
MW2050-P0460	4	0	0	0	0	0	71.6	MW2050-P0460-S06	4	0	0	0	0	0	6	93.2
MW2050-P04100	0	4	0	0	0	0	114.8	MW2050-P04100-S06	0	4	0	0	0	0	6	136.4
MW2050-P04150	0	0	4	0	0	0	155	MW2050-P04150-S06	0	0	4	0	0	0	6	185
MW2050-P04200	0	0	0	4	0	0	155	MW2050-P04200-S06	0	0	0	4	0	0	6	185
MW2050-P04300	0	0	0	0	4	0	275	MW2050-P04300-S06	0	0	0	0	4	0	6	305
MW2050-P0660	6	0	0	0	0	0	93.2	MW2050-P0660-S06	6	0	0	0	0	0	6	114.8

MW2050-P06100	0	6	0	0	0	0	161	MW2050-P06100-S06	0	6	0	0	0	0	6	182.6
MW2050-P06150	0	0	6	0	0	0	215	MW2050-P06150-S06	0	0	6	0	0	0	6	245
MW2050-P06200	0	0	0	6	0	0	215	MW2050-P06200-S06	0	0	0	6	0	0	6	245

Note: 1. N channels 60A rings parallel can be used as 1 channel N \* 60A current. For example: 2 rings 60A parallel could be used as 1 wires 120A  
 2. Optional for adding signal wire, thermocouple signal wire and high temperature resistance, it can be customized on customer's request.  
 Please contact customer service for more information.

### Specification

Electrical Data	
Parameter	Value
	Power
Rated Voltage	0~690VAC/VDC
Insulation Resistance	≥1000MΩ/500VDC
Lead Wires	AWG8#=50A or AWG8 parallel
Lead Length	Standard 300mm
Dielectric Strength	500VAC@50Hz , 60s
Electrical Noise	<0.01Ω
Mechanical Data	
Parameter	Value
Working Life	See Product Quality Level Table
Rotating Speed	See Product Quality Level Table
Working Temperature	-30°C~80°C
Operating Humidity	0~85% RH
Contact Material	See Product Quality Level Table
Housing Material	aluminium alloy
Torque	0.1N.m ; +0.03N.m/6rings
Protection Grade	IP51

### Product Quality Level Table

Products Level Code	Max Rotating Speed	Working Life	Contact Material
VC	100RPM	10 Million Revs	Precious Metal
VD	200RPM	30 Million Revs	Gold-plated

### Options for custom slip ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: [technical@moflon.com](mailto:technical@moflon.com)