


MW3119 Series Slip Rings

MW3119 series is large current slip ring with OD (outer diameter) 119mm and rotor flange installation, Solid style without through bore, This series slip ring can be with rated current 20A/30A/50A to over 100A.

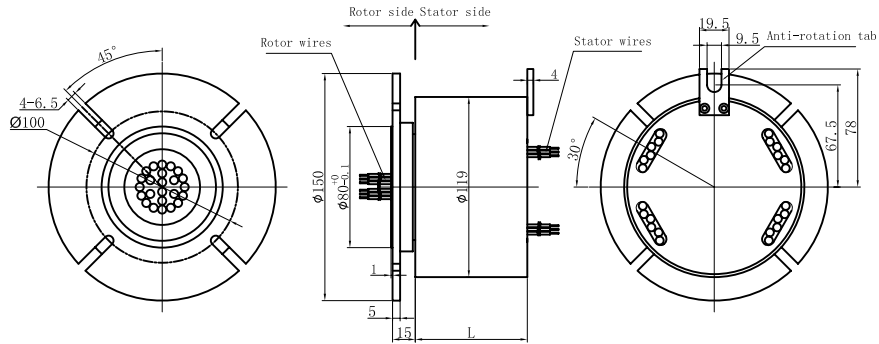

Part# Explanation

MW 3119 - P02100-S06 - VC

MW:large current series slip ring
 3 : solid slip ring with cable exit
 119 : outside diameter 119mm
 P02100 : P-power ring, 02-2 rings (wire),
 100-rated current 100A
 S06 : S-signal ring (or 5A) 06-6 rings (wire)

Product quality level
 VC-common quality version
 VD-industrial quality version
 Default=VC

Part# List

MW3119 Series slip ring part# list																
Part#	60A	100A	150A	200A	300A	500A	length (mm)	part#	60A	100A	150A	200A	300A	500A	Signal ring (Thermocouple)	Length (mm)
MW3119-P0160	1	0	0	0	0	0	39.2	MW3119-P0160-S06	1	0	0	0	0	0	6	60.8
MW3119-P01100	0	1	0	0	0	0	50	MW3119-P01100-S06	0	1	0	0	0	0	6	71.6
MW3119-P01150	0	0	1	0	0	0	65	MW3119-P01150-S06	0	0	1	0	0	0	6	95
MW3119-P01200	0	0	0	1	0	0	65	MW3119-P01200-S06	0	0	0	1	0	0	6	95
MW3119-P01300	0	0	0	0	1	0	95	MW3119-P01300-S06	0	0	0	0	1	0	6	125
MW3119-P01500	0	0	0	0	0	1	125	MW3119-P01500-S06	0	0	0	0	0	1	6	155
MW3119-P0260	2	0	0	0	0	0	50	MW3119-P0260-S06	2	0	0	0	0	0	6	71.6
MW3119-P02100	0	2	0	0	0	0	71.6	MW3119-P02100-S06	0	2	0	0	0	0	6	93.2
MW3119-P02150	0	0	2	0	0	0	95	MW3119-P02150-S06	0	0	2	0	0	0	6	125
MW3119-P02200	0	0	0	2	0	0	95	MW3119-P02200S-06	0	0	0	2	0	0	6	125
MW3119-P02300	0	0	0	0	2	0	155	MW3119-P02300-S06	0	0	0	0	2	0	6	185
MW3119-P02500	0	0	0	0	0	2	215	MW3119-P02500-S06	0	0	0	0	0	2	6	245
MW3119-P0360	3	0	0	0	0	0	60.8	MW3119-P0360-S06	3	0	0	0	0	0	6	82.4
MW3119-P03100	0	3	0	0	0	0	93.2	MW3119-P03100-S06	0	3	0	0	0	0	6	114.8
MW3119-P03150	0	0	3	0	0	0	125	MW3119-P03150-S06	0	0	3	0	0	0	6	155
MW3119-P03200	0	0	0	3	0	0	125	MW3119-P03200-S06	0	0	0	3	0	0	6	155
MW3119-P03300	0	0	0	0	3	0	215	MW3119-P03300-S06	0	0	0	0	3	0	6	245
MW3119-P03500	0	0	0	0	0	3	215	MW3119-P03500-S06	0	0	0	0	0	3	6	245
MW3119-P0460	4	0	0	0	0	0	71.6	MW3119-P0460-S06	4	0	0	0	0	0	6	93.2
MW3119-P04100	0	4	0	0	0	0	114.8	MW3119-P04100-S06	0	4	0	0	0	0	6	136.4
MW3119-P04150	0	0	4	0	0	0	155	MW3119-P04150-S06	0	0	4	0	0	0	6	185
MW3119-P04200	0	0	0	4	0	0	155	MW3119-P04200-S06	0	0	0	4	0	0	6	185
MW3119-P04300	0	0	0	0	4	0	275	MW3119-P04300-S06	0	0	0	0	4	0	6	305
MW3119-P0660	6	0	0	0	0	0	93.2	MW3119-P0660-S06	6	0	0	0	0	0	6	114.8

MW3119-P06100	0	6	0	0	0	0	161	MW3119-P06100-S06	0	6	0	0	0	0	6	182.6
MW3119-P06150	0	0	6	0	0	0	215	MW3119-P06150-S06	0	0	6	0	0	0	6	245
MW3119-P06200	0	0	0	6	0	0	215	MW3119-P06200-S06	0	0	0	6	0	0	6	245

Note: 1. N channels 60A rings parallel can be used as 1 channel N * 60A current. For example: 2 rings 60A parallel could be used as 1 wires 120A

2. Optional for adding signal wire, thermocouple signal wire and high temperature resistance, it can be customized on customer's request. Please contact customer service for more information.

Specification

Electrical Data	
Parameter	Value
	Power
Rated Voltage	0~690VAC/VDC
Insulation Resistance	≥1000MΩ/500VDC
Lead Wires	AWG8#=50A or AWG8 parallel
Lead Length	Standard 300mm
Dielectric Strength	500VAC@50Hz , 60s
Electrical Noise	<0.01Ω
Mechanical Data	
Parameter	Value
Working Life	See Product Quality Level Table
Rotating Speed	See Product Quality Level Table
Working Temperature	-30°C~80°C
Operating Humidity	0~85% RH
Contact Material	See Product Quality Level Table
Housing Material	aluminium alloy
Torque	0.1N.m ; +0.03N.m/6rings
Protection Grade	IP51

Product Quality Level Table

Products Level Code	Max Rotating Speed	Working Life	Contact Material
VC	100RPM	10 Million Revs	Precious Metal
VD	200RPM	30 Million Revs	Gold-plated

Options for custom slip ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable length can be customized for both rotor and stator.
- ② Because of the structure limitation, length/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com