

GJ2015 (ID 15mm, 2 ports in, 2 ports out)

GJ2015 is 2 passages through bore rotary union with bore size 15mm, supporting connection size G1/8 and G3/8, It can transfer media as compressed air, vacuum, hydrogen, nitrogen, steam, cooling water, hot water, oil and so on.



Part# Explanation

GJ2015 - 02

GJ: Through bore rotary union


2 : 2 ports in, 2 ports out

015 : ID 15mm


02 : Port size;

02=G1/8", 04=G3/8"

GJ2015-02 Size 2 ports in, 2 ports out, G1/8 Port

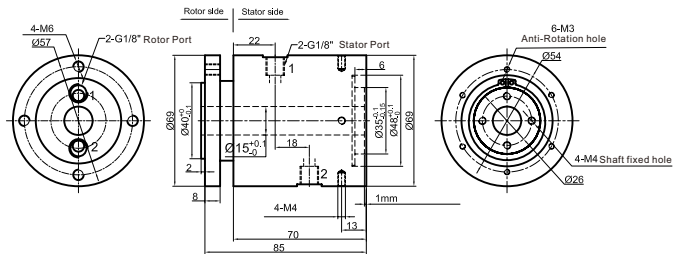

GJ2015-04 Size 2 ports in, 2 ports out, G3/8 Port

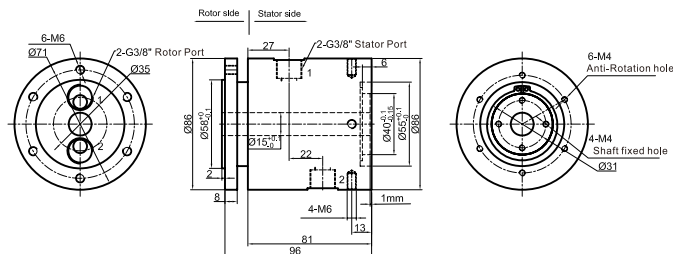

Part# List

GJ2015 Parts# List				
Part#	Passage	Torque(N.M)	Connection Size	ID
GJ2015-02	2 ports in, 2 ports out	1.5	G1/8	15mm
GJ2015-04	2 ports in, 2 ports out	1.5	G3/8	15mm

Specifications

Rotary joint specifications	
Parameter	Value
Passages	2 ports in, 2 ports out,
Max pressure	1MPa (can be customized), Vacuum -80KPa
Torque	See Part#List

Options for custom slip ring

Note: it can be customized as below requirements, lead time would increase 3~15 days, price would increase 5%~50%. Most basic parts of slip ring are standard and modularized, which saved costs and lead time.

- 1 Port size
- 2 Pressure
- 3 Rotating speed
- 4 Through bore size
- 5 Corrosive media, all stainless steel, anti-explosion, high temp etc
- 6 Can combine with electrical slip ring

technical support: technical@moflon.com