



GHS2586 Series

GHS2586 series is a high speed slip ring with bore size 12.7mm, OD 33mm, support 2~12 circuits.

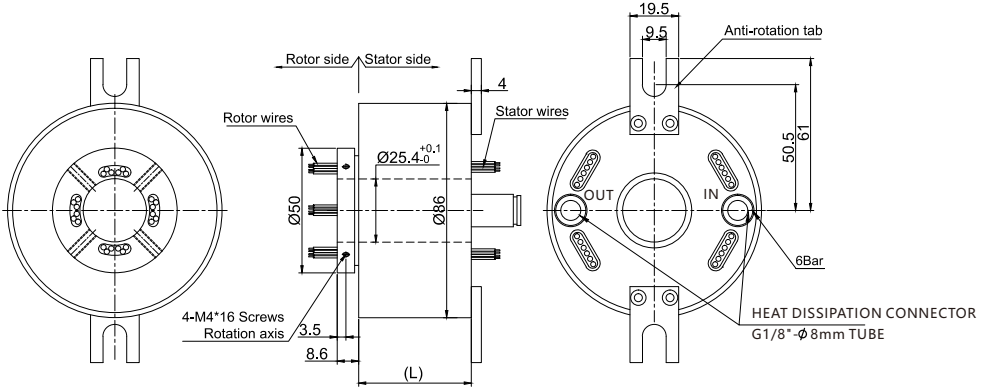

Part# Explanation

GHS 2586 P 06 10 - S 06



Part# List

GHS2586 Series Parts# List							
Part#	10A	Signal or 5A	Length-L (mm)	Part#	10A	Signal or 5A	Length-L (mm)
GHS2586-S06	0	06	55.6	GHS2586-S30	0	30	151.8
GHS2586-P0210-S04	02	04	55.6	GHS2586-P0610-S24	06	24	151.8
GHS2586-P0410-S02	04	02	55.6	GHS2586-P1210-S18	12	18	151.8
GHS2586-P0610	06	0	55.6	GHS2586-P1810-S12	18	12	151.8
GHS2586-S12	0	12	78.4	GHS2586-P2410-S06	24	06	151.8
GHS2586-P0210-S10	02	10	78.4	GHS2586-P3010	30	0	151.8
GHS2586-P0410-S08	04	08	78.4	GHS2586-S36	0	36	174.6
GHS2586-P0610-S06	06	06	78.4	GHS2586-P0610-S30	06	30	174.6
GHS2586-P0810-S04	08	04	78.4	GHS2586-P1210-S24	12	24	174.6
GHS2586-P1010-S02	10	02	78.4	GHS2586-S1810-S18	18	18	174.6
GHS2586-P1210	12	0	78.4	GHS2586-P2410-S12	24	12	174.6
GHS2586-S18	0	18	101.2	GHS2586-P3610	36	0	174.6
GHS2586-P0210-S16	02	16	101.2	GHS2586-S48	0	48	220.2
GHS2586-P0410-S14	04	14	101.2	GHS2586-P10610-S42	06	42	220.2
GHS2586-P0610-S12	06	12	101.2	GHS2586-P1210-S36	12	36	220.2
GHS2586-P0810-S10	08	10	101.2	GHS2586-P1810-S30	18	30	220.2
GHS2586-P1010-S08	10	08	101.2	GHS2586-P2410-S24	24	24	220.2
GHS2586-P1210-S06	12	06	101.2	GHS2586-S60	0	60	270.8
GHS2586-P1410-S04	14	04	101.2	GHS2586-P0610-S54	06	54	270.8
GHS2586-P1610-S02	16	02	101.2	GHS2586-P1210-S48	12	48	270.8
GHS2586--S24	0	24	124	GHS2586-P1810-S42	18	42	270.8
GHS2586-P1610-S18	06	18	124	GHS2586-P2410-S36	24	36	270.8
GHS2586-P1210-S12	12	12	124	GHS2586-S72	0	72	316.4
GHS2586-P0810-S06	18	06	124	GHS2586-S84	0	84	365
GHS2586-P2410	24	0	124	GHS2586-S96	0	96	410.6

Note: N channels 10A rings parallel can be used as 1 channel N*10A current. For example: 2 rings 10A parallel could be used as 1 wires 20A. 10A,5A (signal) can combine freely in any way.It can be customized based on standard slip ring,please contact customer service for more detmails.

Specifications

Mechanical Data		Electrical Data		
Parameter	Value	Parameter	Value	
Working Life	150 million revs		Power	Signal
Rotating Speed	1~9000RPM	Rated Voltage	0~440VAC/VDC	0~440VAC/VDC
Working Temperature	-30°C~80°C	Insulation Resistance	≥1000MΩ/500VDC	≥1000MΩ/500VDC
Operating Humidity	0~85% RH	Lead Wires	AWG16#Teflon	AWG22#Teflon
Contact Material	See Prod Quality Level	Lead LenGSH	Standard 300mm	
Housing Material	Aluminium Alloy	Insulation StrenGSH	500VAC@50Hz, 60s	
Torque	0.1N.m; +0.03/6ring	Electrical Noise	<0.01Ω	
Protection Grade	IP51			

Lead Wires Color Code

Ring	1	2	3	4	5	6	7	8	9	10	11	12
Color	BLK	RED	YEL	GRN	BLU	WHT	BLK	RED	YEL	GRN	BLU	WHT

(6 wires for 1 group color, from 7-12, repeat the same color as 1...6, indicated with number code pipe)

Options For Custom Slip Ring

Note: Below special demands can be customized. According, the delivery date will be extended 3 to 15 days; also the cost will be increased 30% to 50%. Most of our basic parts are standard and modular, which can save the cost and lead time.

- ① Cable exit way and cable lenGSH can be customized for both rotor and stator.
- ② Because of the structure limitation, lenGSH/height/OD can be customized on your request.
- ③ Support current or signal up to 200 rings.
- ④ Aviation plug, terminal and heat-shrink tube are optional.
- ⑤ Hybrid slip ring for Yaskawa/Panasonic/Siemens servo control signal, power line and encoder line.
- ⑥ Support mixed high speed data transmission (including Ethernet, USB, RS232, RS485, Profibus, CanBUS, CANOPEN, DeviceNET, CC-LINK, ProfiNET, EtherCAT, etc.)
- ⑦ Can combine temperature control signal with thermocouple signal.
- ⑧ Special environment can be customized, such as quakeproof, high temperature, etc.
- ⑨ Hybrid Pneumatic/hydraulic and electric slip ring can be mixed.
- ⑩ High temperature can up to 500 degrees.
- ⑪ High pressure can up to 110KV
- ⑫ Rotating speed can up to 10000RPM
- ⑬ Maximum current can up to 5000 amperes.
- ⑭ Military grade
- ⑮ Optional for underwater IP65, IP68.
- ⑯ Optional for stainless steel housing

Technical support: technical@moflon.com